



Lifting Modules Range

Max. lifting force 2,000 N, stroke from 440 to 940 mm,
electro-mechanical Telescope version



Application

Double telescopic lifting module for workshop applications in the industry.

Principal use

- Automation
- Drive technology, gears box assembly
- Couplings, cardan shafts
- Compressors, pumps, hydraulic elements
- Industrial fittings
- Materials-handling technology
- Automotive industry and their suppliers
- Mechanical engineering
- Building and agricultural machines
- Electronics

Fixing and installation

For fixing of *moduhub* modules or other components of the user at the top plate, the lifting module has an interface 140 x 140.

The bottom plate with double interface 200 x 200 is used to fix the lifting module on the flat level floor.

For fixing, 6 screws M10 of property class 10.9 as well as heavy-duty plugs are to be used.

For increased stability, a base plate, which can be mounted to the bottom plate, is available as accessory. Fixing on the floor is made by means of the base plate.

Advantages

- Low basic height
- Good accessibility
- Very high flexibility
- Improved productivity
- Simple integration
- Optimised ergonomics
- Simple operation

Description

The drive of the telescopic lifting module Range consists of a 230VAC motor and a spindle drive with trapezoidal spindle.

A motor brake in combination with the trapezoidal spindle guarantees safe holding of the driven position.

The telescopic guide unit consists of a precise aluminium profile section with a pre-stressed plain bearing with low friction and without clearance for exact positioning.

The compact construction with low height and small width guarantees an unhindered accessibility to the workpiece from all sides.

Mechanical and electric interfaces can be easily integrated in the process of automation.

Operation

The operation is made by hand panel or foot switch or alternatively by a primary electric control.

Lifting and lowering is triggered by push-buttons with touch control contact. After release of the push-button, the motion will be immediately stopped.

Material

Lifting profile: aluminium, naturally anodised


Top and bottom plate: aluminium, black anodised

Protection cap: steel, light grey lacquered

moduhub

Lifting module

Part no. 892402XXE



Technical data

Max. lifting force: 2,000 N
Max. torque: 500 Nm
Stroke: 440 to 940 mm


Operations

- Foot switch
- Hand panel



Combinable with the modules

- Rotating module – horizontal axis DMH 200 as per data sheet M 1.101, DMHe 200 as per data sheet M 1.201
- Rotating module – vertical axis DMV 600 as per data sheet M 1.301, DMVe 600 as per data sheet M 1.201
- Tilting modules KMB 100 as per data sheet M 2.101 KME 100 as per data sheet M 2.201



moduhub interfaces

- Top plate: 140 x 140 - Ø 10.5 mm
- Bottom plate: 200 x 200 - Ø 10.5 mm

Accessories

- Electrical operating elements as per data sheet M 8.203
- Mains cable 230 VAC see page 2
- Base and adaptor plates as per data sheet M 8.100 and M 8.110
- Table plates as per data sheet M 8.130 and M 8.131



Technical data

Lifting speed	70 mm/s
Electric connection	1/PE (230 VAC/50 Hz)
Rating	0.75 kW
Control voltage	24 VDC
Duty cycle	20 % ED
Code class	IP 54

Important notes



The lifting module must only be pressure loaded. The centre of gravity should be within the traverse of the fixing screws.

If the centre of gravity is outside, the dowelled joint with the floor has to be dimensioned correspondingly. In such cases it is recommended to use a larger base plate.

The lifting module is designed for applications within closed rooms. Not suitable for applications with impact load or vibration.

Stroke [mm]	A [mm]	A + stroke [mm]	Weight [kg]
440	470	910	73
540	520	1060	77
740	620	1360	84
940	720	1660	91

Dimensions

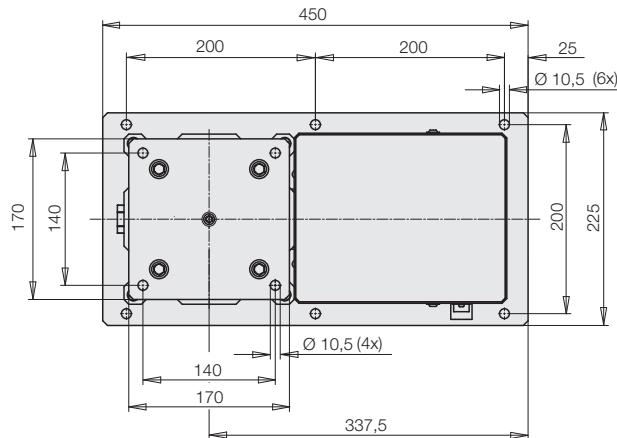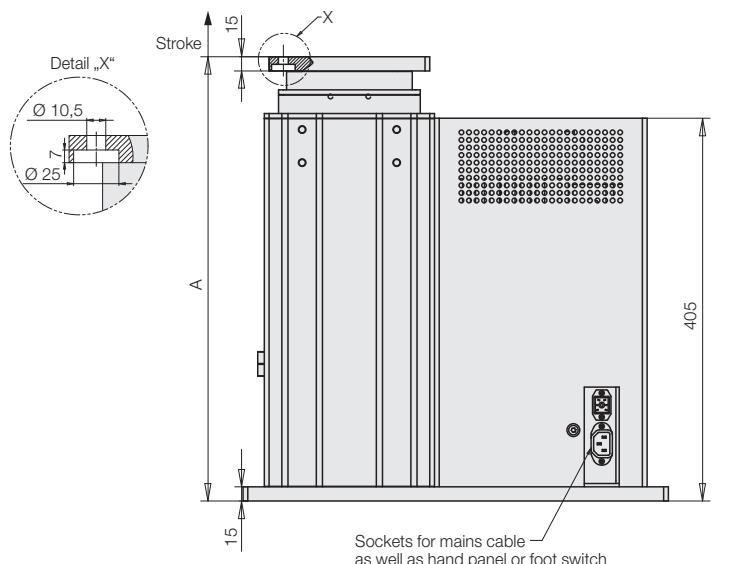

Accessories

Base plate for increased stability
as per data sheet M 8.100

Code for part numbers

Part no.

8924 02 XX E

Stroke


44 = 440 mm

54 = 540 mm

74 = 740 mm

94 = 940 mm

Maximum lifting force and maximum admissible torque load

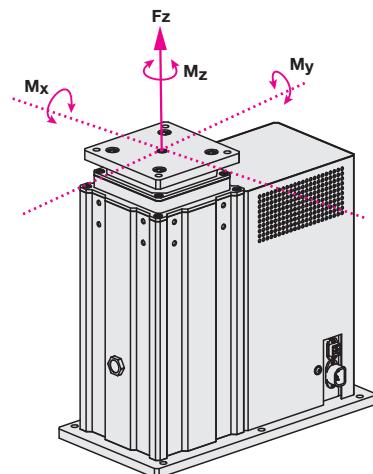

Maximum lifting force Fz: 2,000 N

Maximum torque load

Total Mx/y: 500 Nm

Mz: 300 Nm

In the case of eccentric loads, it is recommended to compensate these by counterweights. In off-position, the indicated maximum torques may occur.

The forces and torques have to be considered by the operator.

During the lifting motion, only 50 % of the maximum values are admitted.

Delivery

The lifting modules are delivered ready for connection. Electrical operating elements and mains cables can be ordered separately as an accessory.

Electrical accessories required for a functional system:

- Hand panels and foot switch as per data sheet M 8.203
- Mains cable 230 VAC
Mains cable, smooth with earthing type plug, 3 m

Part no. 3829 202