




Bike proStand

Stationary assembly fixture for bicycles, cargo bikes and e-bikes
electrically operated

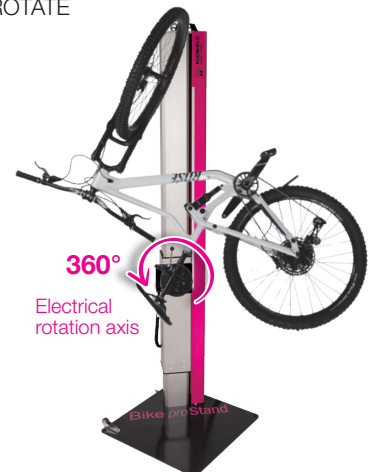

Application

Bike proStand is a stationary, electrically operated assembly fixture for bicycles, cargo bikes and e-bikes weighing up to 40 kg. Without an electrical rotation axis it can accommodate up to 70 kg.

Advantages

- Picking up and setting down all types of bicycles from the ground with a 1225 mm electrical stroke and 360° electrical rotation axis
- Universal use due to interchangeable clamping pick-ups
- Safe working due to design according to EC Machinery Directive
- Collision shutdown
- Ergonomic working through best accessibility thanks to force-free rotation of the bicycle with electrical rotation axis
- Play-free guidance
- 15,000 cycles durability tested

Description

Due to the sturdy, industrial quality design **Bike proStand** can be used for both assembly and repair.

The lifting and rotation axis are electrically operated. Both axes are operated with a common hand panel.

Since both axes are self-locking, each set position is held securely.

The large stroke of 1225 mm makes it possible to lift the bicycles from the ground and bring them to an optimal assembly height. The rotation axis allows endless rotation at any height. The lifting axis has a shutdown function if a collision occurs during lowering.

Operation

Operation is via a hand panel that actuates the functions "Up/Down" and "Rotate left/Rotate right" ("Up/Down" only with 6401 205).

There is a holder on the slide for hanging the hand panel.

Note

Mounting to the ground

The assembly fixture must be screwed to the floor, wall or ceiling in order to comply with the CE certification (min. concrete strength class C 20/25).

With larger base plates (available on request), the assembly fixture can also be used free-standing.

Alternatively, the **Bike proStand** can be fixed with the wall and ceiling mounting set. In harsh environmental conditions, however, it is always advisable to attach it to the floor.

Transport rollers

The base plate is equipped with 2 transport rollers for moving the **Bike proStand**.

The transport rollers can simply be unscrewed after installation.

Versions

- with lifting and rotation axis: up to 40 kg
- with lifting axis (without rotation axis): up to 70 kg

Accessories as per data sheet M 8.902

- Clamping pick-ups
- Holders and shelves
- Wall/ceiling mount

Accessories on request

- Larger base plates
- Special clamping and mounting fixtures

